

SPR1/SPR3 Series

LED Display, Single-Phase/3-Phase, Slim, Power Controller

NEW

■ Features

- Refine and slim body design
- LED display for real time monitoring (control input, load voltage, load current, load power, load resistance and heatsink temperature) and checking parameter settings
- Stable control by feedback control (constant current/constant voltage/constant power control)
- Communication output model available: RS485 (Modbus RTU method)
- Convenient parameter settings via PC (RS485 communication)
: Free download the comprehensive device management program (DAQMaster)
- Various alarm functions (alarm output)
: overcurrent, overvoltage, heatsink overheat, fuse break, SCR error
- Easy installation of the bracket
- Simple fuse replacement structure for easy maintenance
- Highly reliable SCR (IXYS) element



! Please read "Safety considerations" in operation manual before using.



■ Manual

- For the detail information and instructions, please refer to user manual for communication, and be sure to follow cautions written in the technical descriptions (catalog, homepage). Visit our homepage (www.autonics.com) to download manuals.
- User manual for communication manual describes for RS485 communication (Modbus RTU protocol) and parameter address map data.


■ Comprehensive Device Management Program (DAQMaster)

- DAQMaster is a comprehensive device management software for setting parameters and monitoring processes.
- Visit our website (www.autonics.com) to download user manual and comprehensive device management program.

< Computer specification for using software >

Item	Minimum specifications
System	IBM PC compatible computer with Pentium III or above
Operations	Windows 98/NT/XP/Vista/7/8/10
Memory	256MB+
Hard disk	1GB+ of available hard disk space
VGA	Resolution: 1024×768 or higher
Others	RS232C serial port (9-pin), USB port

< DAQMaster screen >

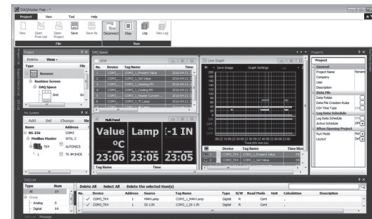

■ Ordering Information

SPR 1 — 2 70 T F F

Fuse	N	Non-fuse ^{*1}		
	F	Fuse		
Feedback control	N	Normal control		
	F	Normal/constant current/constant voltage/constant power control		
Option output	N	Alarm output		
	T	Alarm+RS485 comm. output		
Rated load current	25	25A	70	70A
	35	35A	100	100A
	50	50A	150	150A
Rated load voltage	1	110VAC		
	2	220VAC		
	3	380VAC		
	4	440VAC		
Control phase	1	Single-phase		
	3	3-phase		
Item	SPR	Solid State Power Regulator (slim type)		

^{*1}: Product is not equipped with a rapid fuse inside. Install the suitable fuse for rated load current of the model separately. (The performance of the product is guaranteed only when using the fuse provided by us.)

LED Display, Single-Phase/3-Phase, Slim, Power Controller

Specifications

Model	SPR1 -1□□□□	SPR1- 2□□□□	SPR1 -3□□□□	SPR1 -4□□□□	SPR3 -1□□□□	SPR3- 2□□□□	SPR3 -3□□□□	SPR3 -4□□□□
Control phase	Single-phase				3-phase			
Rated load voltage (50/60Hz)	110VAC~	220VAC~	380VAC~	440VAC~	110VAC~	220VAC~	380VAC~	440VAC~
Power supply	100-240VAC~ 50/60Hz							
Min. load current	1A							
Permissible voltage range	90 to 110% of rated voltage							
Power consumption	<ul style="list-style-type: none"> Rated load current 25A/35A/50A: max. 7VA Rated load current 70A/100A/150A: max. 12VA 				<ul style="list-style-type: none"> Rated load current 25A/35A/50A: max. 14VA Rated load current 70A: max. 22VA Rated load current 100A/150A: max. 32VA 			
Display method	3-digit 7-segment LED							
Indicator	<ul style="list-style-type: none"> Operation indicator/Manual control indicator: green LED Alarm indicator/output indicator/unit (V, A) indicator: red LED 							
Control method	<ul style="list-style-type: none"> Phase control: normal control mode, constant current/constant voltage/constant power feedback control mode Cycle control: fixed cycle control mode, variable cycle control mode ON/OFF control 				<ul style="list-style-type: none"> Phase control: normal control mode, constant current/constant voltage/constant power feedback control mode Cycle control: fixed cycle control mode, ON/OFF control 			
Applied load	<ul style="list-style-type: none"> Phase control, ON/OFF control: resistance load, inductive load Cycle control: resistance load 							
Control input	<ul style="list-style-type: none"> Auto control: DC4-20mA, 1-5VDC\equiv, ON/OFF contact (no-voltage input), pulse voltage (5-12VDC\equiv) Manual control: outside adjuster (10kΩ), inside adjuster (output limit) 							
Digital input (DI)	RUN/STOP switching, AUTO/MAN switching, RESET							
Output	Alarm	250VAC~ 3A, 30VDC \equiv 3A, 1c resistive load						
	Communication	RS485 communication output (Modbus RTU method), max. connection: 31 units						
Output range	<ul style="list-style-type: none"> Phase control: 0 to 98% Cycle control: 0 to 100% ON/OFF control: 0%, 100% 							
Output accuracy	<ul style="list-style-type: none"> Normal control: within $\pm 10\%$ F.S. of rated load voltage Constant current feedback control: within $\pm 3\%$ F.S. of rated load current Constant voltage feedback control: within $\pm 3\%$ F.S. of rated load voltage Constant power feedback control: within $\pm 3\%$ F.S. of rated load power 							
Set method	By front keys, by communication							
Functions		Output limit (OUT ADJ), AUTO/MAN selection, control method selection, RESET, SOFT START, SOFT UP/DOWN, output high/low limit, input correction, input slope correction, monitoring (control input, load voltage/current/power/resistance, power supply frequency, heatsink temperature)						
	Alarm	Overcurrent alarm, overvoltage alarm, fuse break alarm, SCR error alarm, heater break alarm, heatsink overheat alarm						
Cooling method	<ul style="list-style-type: none"> Rated load current 25A/35A/50A: natural cooling Rated load current 70A/100A/150A: forced air cooling (with the cooling fan) 							
Insulation resistance	Over 200M Ω (at 500VDC megger)							
Dielectric strength	2,000VAC 50/60Hz for 1 min (between input terminals and power terminals)							
Output leakage current	Max. 10mA _{rms}							
Noise immunity	± 2 kV the square wave noise (pulse width: 1 μ s) by the noise simulator							
Memory retention	Approx. 10 years (when using non-volatile semiconductor memory type)							
Vibration	Mechanical	0.75mm amplitude at frequency of 5 to 55Hz in each X, Y, Z direction for 2 hours						
	Malfunction	0.5mm amplitude at frequency of 5 to 55Hz in each X, Y, Z direction for 10 min						
Environment	Ambient temp.	-10 to 55°C, storage: -20 to 80°C						
	Ambient humi.	35 to 85%RH, storage: 35 to 85%RH						
Accessory	11-pin connector				11-pin connector, isolating barrier: 4			
Approval	CE				CE			
Weight ^{※1}	<ul style="list-style-type: none"> Rated load current 25A/35A/50A : approx. 1.6kg (approx. 1.3kg) Rated load current 70A: approx. 1.65kg (approx. 1.35kg) Rated load current 100A/150A : approx. 3.2kg (approx. 2.8kg) 				<ul style="list-style-type: none"> Rated load current 25A/35A/50A : approx. 4.9kg (approx. 4.1kg) Rated load current 70A: approx. 5kg (approx. 4.2kg) Rated load current 100A/150A : approx. 9.7kg (approx. 8.7kg) 			

※1: The weight includes packaging. The weight in parenthesis is for unit only.

※Environment resistance is rated at no freezing or condensation.

(A) Photoelectric Sensors

(B) Fiber Optic Sensors

(C) Door/Area Sensors

(D) Proximity Sensors

(E) Pressure Sensors

(F) Rotary Encoders

(G) Connectors/ Connector Cables/ Sensor Distribution Boxes/Sockets

(H) Temperature Controllers

(I) SSRs / Power Controllers

(J) Counters

(K) Timers

(L) Panel Meters

(M) Tacho / Speed / Pulse Meters

(N) Display Units

(O) Sensor Controllers

(P) Switching Mode Power Supplies

(Q) Stepper Motors & Drivers & Controllers

(R) Graphic/ Logic Panels


(S) Field Network Devices

(T) Software


SPR1/SPR3 Series

■ Unit Description

© SPR1 Series

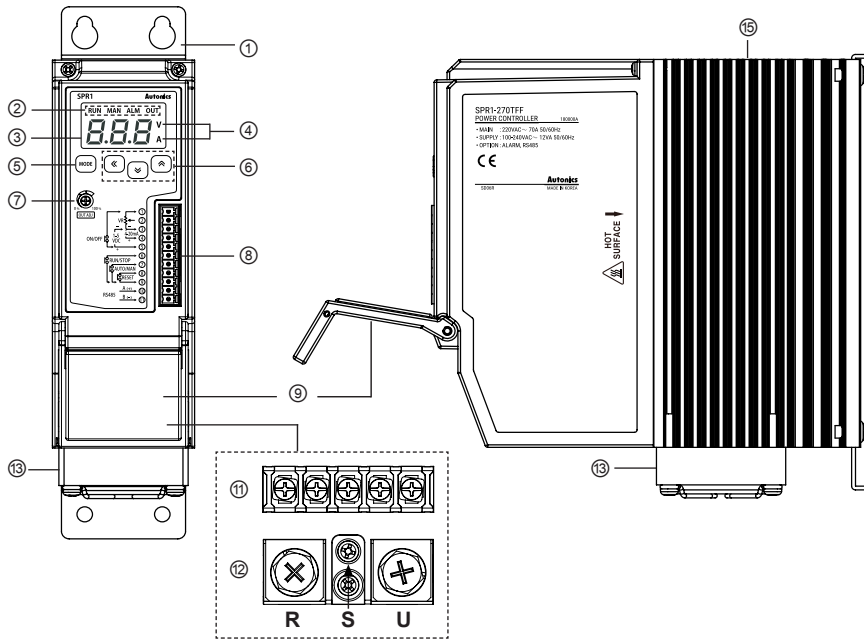

© SPR3 Series

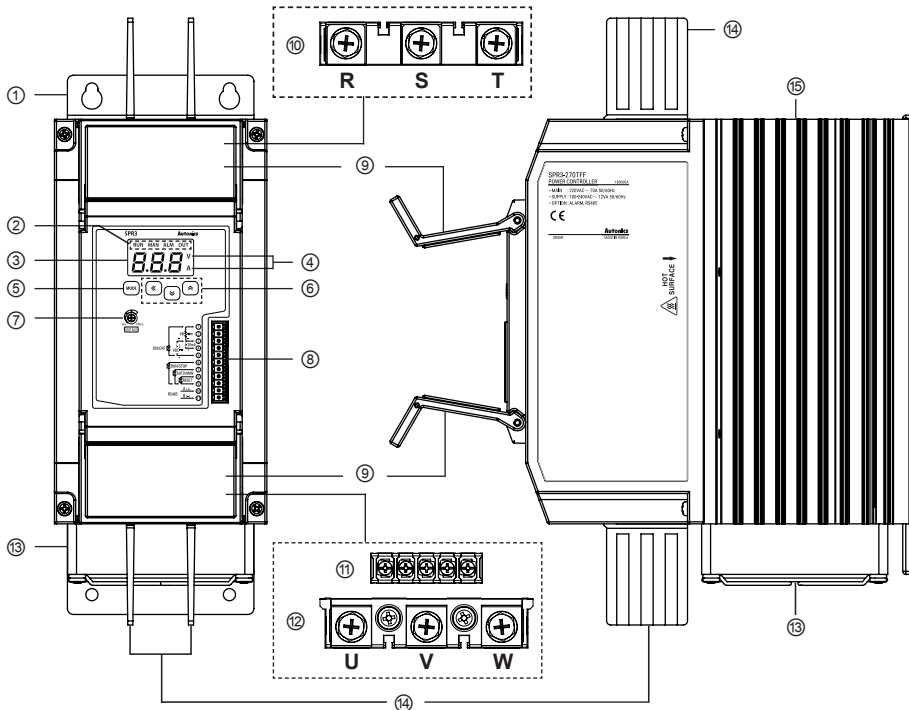

LED Display, Single-Phase/3-Phase, Slim, Power Controller

※Shaded parts () are only for SPR3 Series.

① Bracket(except rated load current 100A/150A models)

② Indicator

Indicator		Color	Function
RUN	Operation indicator	Green LED	Turns on in the RUN mode.
MAN	Manual control indicator	Green LED	Turns on when adjusting load output in the manual control mode.
ALM	Alarm indicator	Red LED	Flashes in alarming status.
OUT	Output indicator	Red LED	Turns on when load control outputs.

③ Display part: Displays settings of the front display [d1 5] parameter in RUN mode, and displays parameter and setting value in setting mode.

④ Unit indicator (☀: Light ON/●: Light OFF)

Indicator		Display
V	A	
●	●	Resistance, load
☀	●	Voltage
●	☀	Current
☀	☀	Power

⑤ () key: Enters parameter group, returns to RUN mode, moves parameters, and saves the setting value.

⑥ Setting value adjustment key: Enters SV setting mode and move digits.

⑦ Output limit adjuster (OUT ADJ): Limits output from 0 to 100%.

⑧ 11-pin connector terminal

⑨ Terminal cover

⑩ Load input terminal

⑪ Alarm output and power input terminals

⑫ Load output terminals

⑬ Cooling fan: For models with the rated load current of 70A/100A/150A, a cooling fan is attached.

⑭ Insulating barrier: For phase to phase insulation of the load input/output terminals, install the barriers to the unit.

⑮ Heatsink: In case of rated load current 100A/150A models, there are mounting holes on the right/left.

■ Wire Specification by Load Current

Rated load current	Wire specification			
	Alarm output/ power input	Load output(SPR1 Series)		Load input/output (SPR3 Series)
		S	R, U	
25A/35A/50A/70A	AWG 18 to 14	AWG 18 to 14	AWG 13 to 4	AWG 13 to 4
100A/150A			AWG 4 to 2/0	AWG 4 to 2/0

(A)
Photoelectric
Sensors

(B)
Fiber
Optic
Sensors

(C)
Door/Area
Sensors

(D)
Proximity
Sensors

(E)
Pressure
Sensors

(F)
Rotary
Encoders

(G)
Connectors/
Connector Cables/
Sensor Distribution
Boxes/Sockets

(H)
Temperature
Controllers

(I)
SSRs / Power
Controllers

(J)
Counters

(K)
Timers

(L)
Panel
Meters

(M)
Tacho /
Speed / Pulse
Meters

(N)
Display
Units

(O)
Sensor
Controllers

(P)
Switching
Mode Power
Supplies

(Q)
Stepper Motors
& Drivers
& Controllers

(R)
Graphic/
Logic
Panels

(S)
Field
Network
Devices

(T)
Software


SPR1/SPR3 Series

■ Dimensions


(unit: mm)

◎ SPR1 Series


- Rated load current 25A/35A/50A

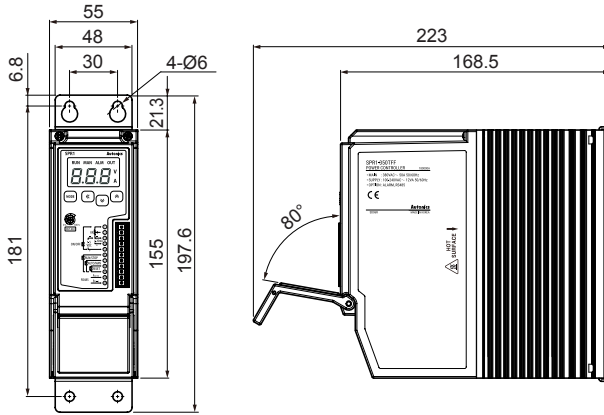

- Rated load current 70A

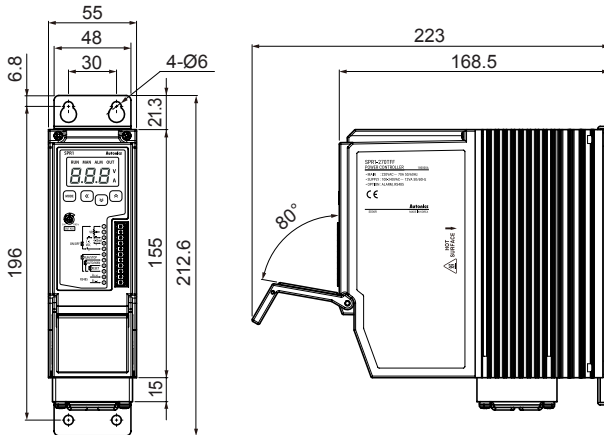


- Rated load current 100A/150A

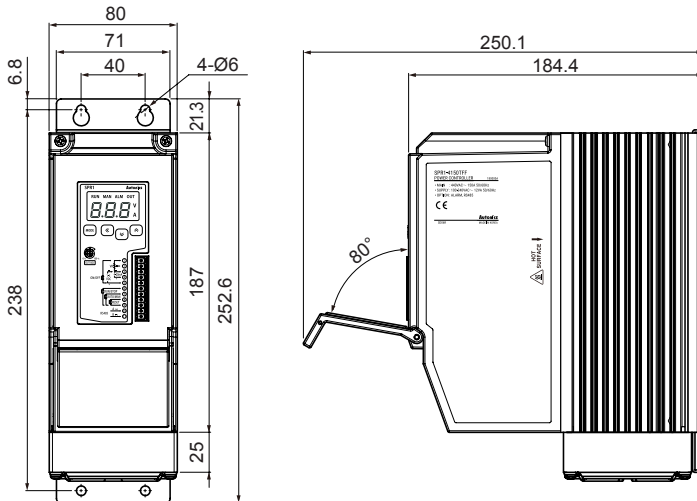


LED Display, Single-Phase/3-Phase, Slim, Power Controller

◎ SPR3 Series


- Rated load current 25A/35A/50A

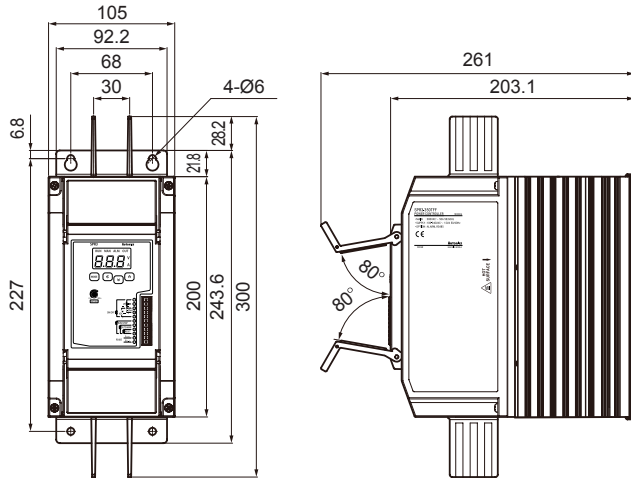


- Rated load current 70A

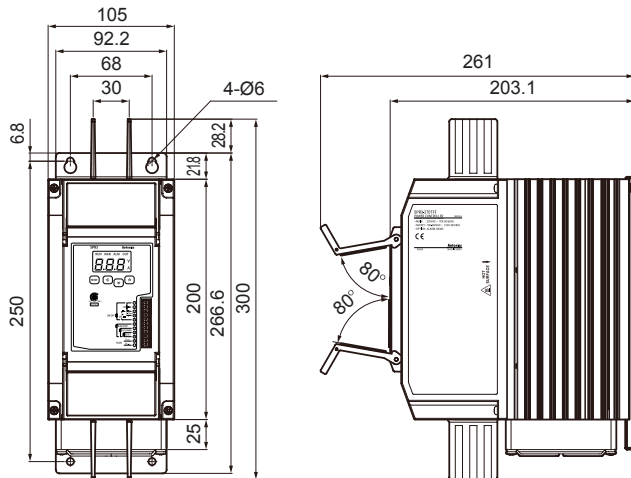

- Rated load current 100A/150A

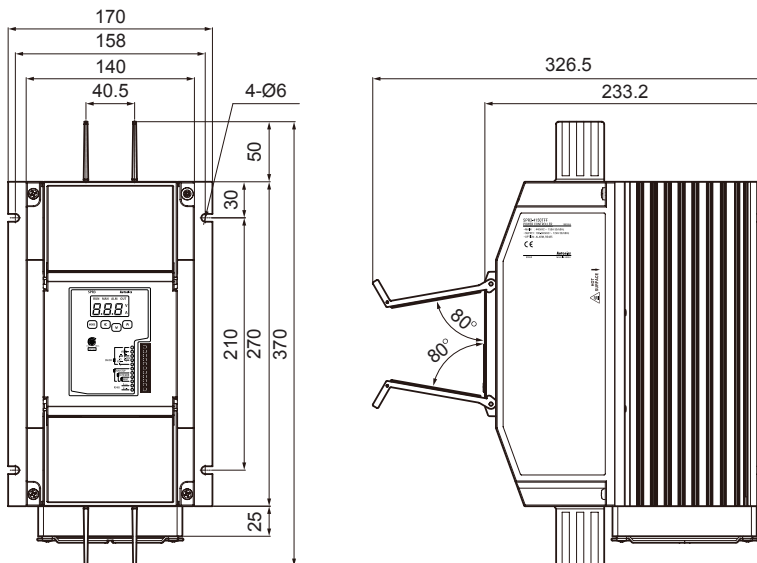

◎ Spacing

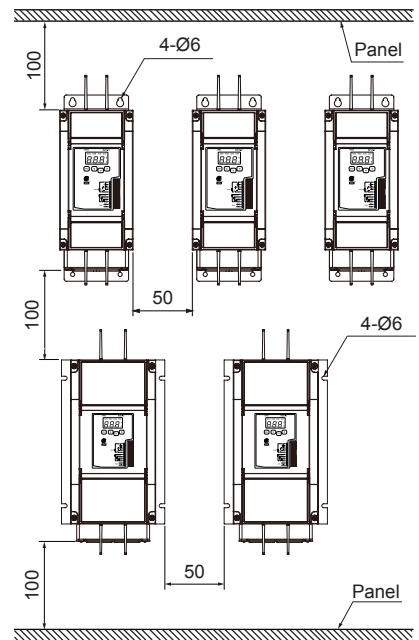

※When installing multiple power controllers, please keep space at least 50mm in horizontal and 100mm in vertical between power controllers for heat radiation.



High Temperature Caution


While supplying power to the load or right after turning off the power of the load, do not touch the body and heatsink. Failure to follow this instruction may result in a burn due to the high temperature.

(A)	Photoelectric Sensors
(B)	Fiber Optic Sensors
(C)	Door/Area Sensors
(D)	Proximity Sensors
(E)	Pressure Sensors
(F)	Rotary Encoders
(G)	Connectors/ Connector Cables/ Sensor Distribution Boxes/Sockets
(H)	Temperature Controllers
(I)	SSRs / Power Controllers
(J)	Counters
(K)	Timers
(L)	Panel Meters
(M)	Tacho / Speed / Pulse Meters
(N)	Display Units
(O)	Sensor Controllers
(P)	Switching Mode Power Supplies
(Q)	Stepper Motors & Drivers & Controllers
(R)	Graphic/ Logic Panels
(S)	Field Network Devices
(T)	Software


SPR1/SPR3 Series

■ Connections


◎ Control input/Comm. output

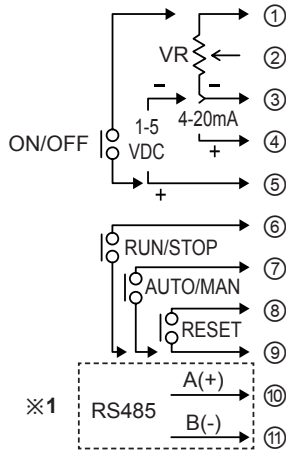


◎ Load output (SPR1 Series)

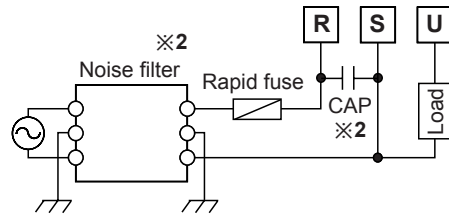

◎ Load input/output (SPR3 Series)

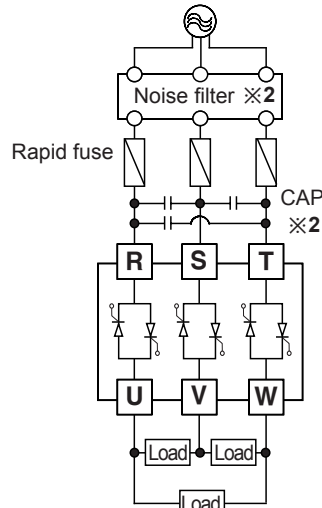

◎ Alarm output/power input

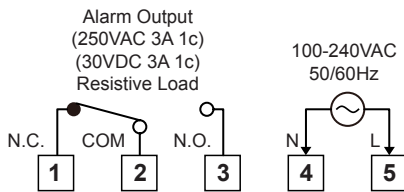

※1: This is only for models with RS485 communication output (SPR□-□□T□□).

※2: When connecting noise filter and capacitor, it is appropriate for EMC.

CAP : Rated load voltage 110VAC-220VAC → 1uF/250VAC

: Rated load voltage 380VAC-440VAC → 0.47uF/500VAC

※Tighten the terminal screw with the below tightening torque.

Rated load current	Specification	Alarm output/ power input	Load output (SPR1 Series)			Load input/output (SPR3 Series)
			S	R, U		
25A, 35A, 50A, 70A	Screw	M3	M3	M6	M6	
	Tightening torque	0.5N·m	0.5N·m	5.5 to 6.0N·m	5.5 to 6.0N·m	
100A, 150A	Screw	M3	M3	M8	M8	
	Tightening torque	0.5N·m	0.5N·m	6.5 to 7.0N·m	6.5 to 7.0N·m	

※Use crimp terminals or terminals of size specified below.

(unit: mm)


Terminal type	Terminal number	a	b	c
Input (11-pin)	1 to 11	6 to 7	Max. 1.5	Max. 3.5
Terminal type		a	b	
Alarm output/power input		Min. 3.0	Max. 6.0	
Load output (SPR1 Series)	S	Min. 3.0	Max. 8.0	
	R, U	Rated load current 25A/35A/50A/70A	Min. 6.0	Max. 16.0
		Rated load current 100A/150A	Min. 8.0	Max. 26.0
Load input/output (SPR3 Series)	R, S, T, U, V, W	Rated load current 25A/35A/50A/70A	Min. 6.0	Max. 16.0
		Rated load current 100A/150A	Min. 8.0	Max. 26.0

LED Display, Single-Phase/3-Phase, Slim, Power Controller


Derating Curve

SPR1 Series


Rated load current 25A

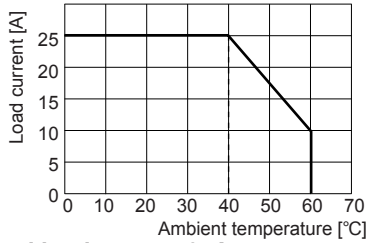


Rated load current 35A

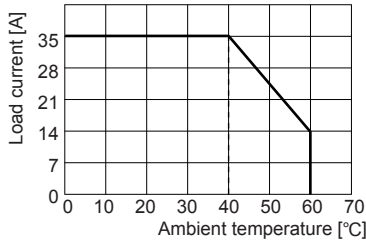


Rated load current 50A

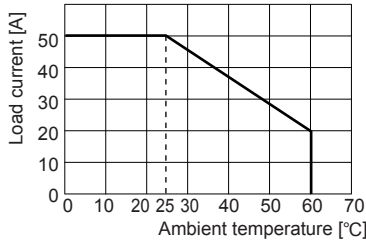


Rated load current 70A

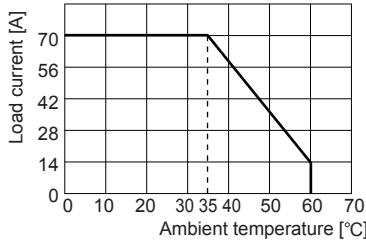

Rated load current 100A

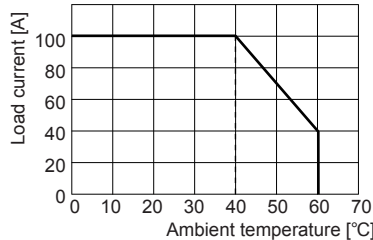


Rated load current 150A

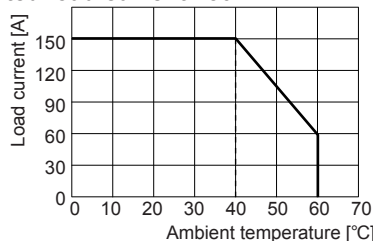


SPR3 Series


Rated load current 25A

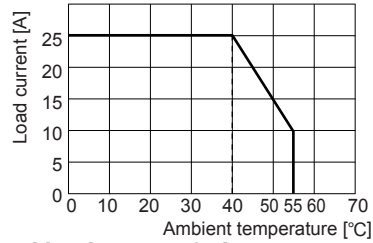


Rated load current 35A

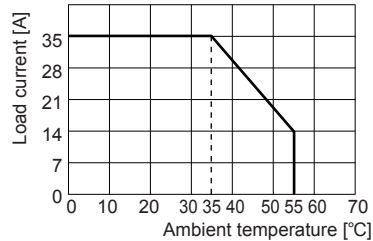


Rated load current 50A

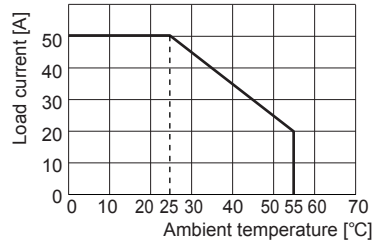


Rated load current 70A

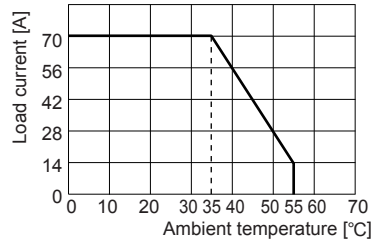

Rated load current 100A

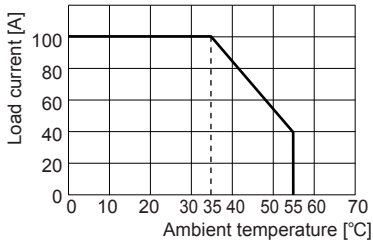


Rated load current 150A

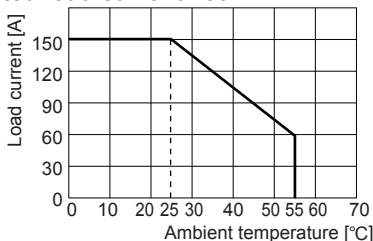

(A)	Photoelectric Sensors
(B)	Fiber Optic Sensors
(C)	Door/Area Sensors
(D)	Proximity Sensors
(E)	Pressure Sensors
(F)	Rotary Encoders
(G)	Connectors/ Connector Cables/ Sensor Distribution Boxes/Sockets
(H)	Temperature Controllers
(I)	SSRs / Power Controllers
(J)	Counters
(K)	Timers
(L)	Panel Meters
(M)	Tacho / Speed / Pulse Meters
(N)	Display Units
(O)	Sensor Controllers
(P)	Switching Mode Power Supplies
(Q)	Stepper Motors & Drivers & Controllers
(R)	Graphic/ Logic Panels
(S)	Field Network Devices
(T)	Software

SPR1/SPR3 Series

■ Parameter Group

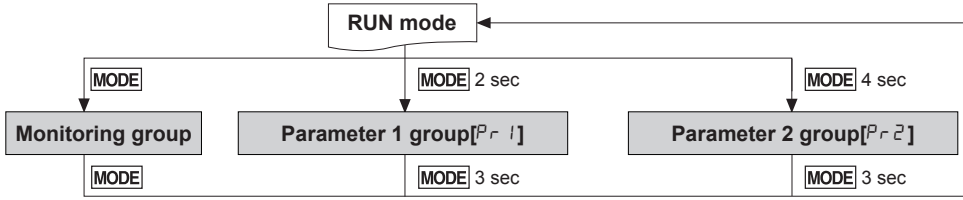

※ If there is no key input for 30 sec while setting SV or the parameters, the new settings are ignored, and the unit will return to RUN mode with previous settings.

※ Hold the **MODE** key for 3 sec while in setting mode to return to RUN mode.

◎ Monitoring group


※1: **S**: Press any key among **◀**, **▶**, **↶**.

※2: Press the **MODE** key once after changing the setting value, to save the setting value and move to the next parameter

※ Hold the **MODE** key for 3 sec to save the setting value and return to RUN mode after changing the setting value.


※ : Dotted parameters may not appear by model type or other parameter settings.

● SPR1 Series

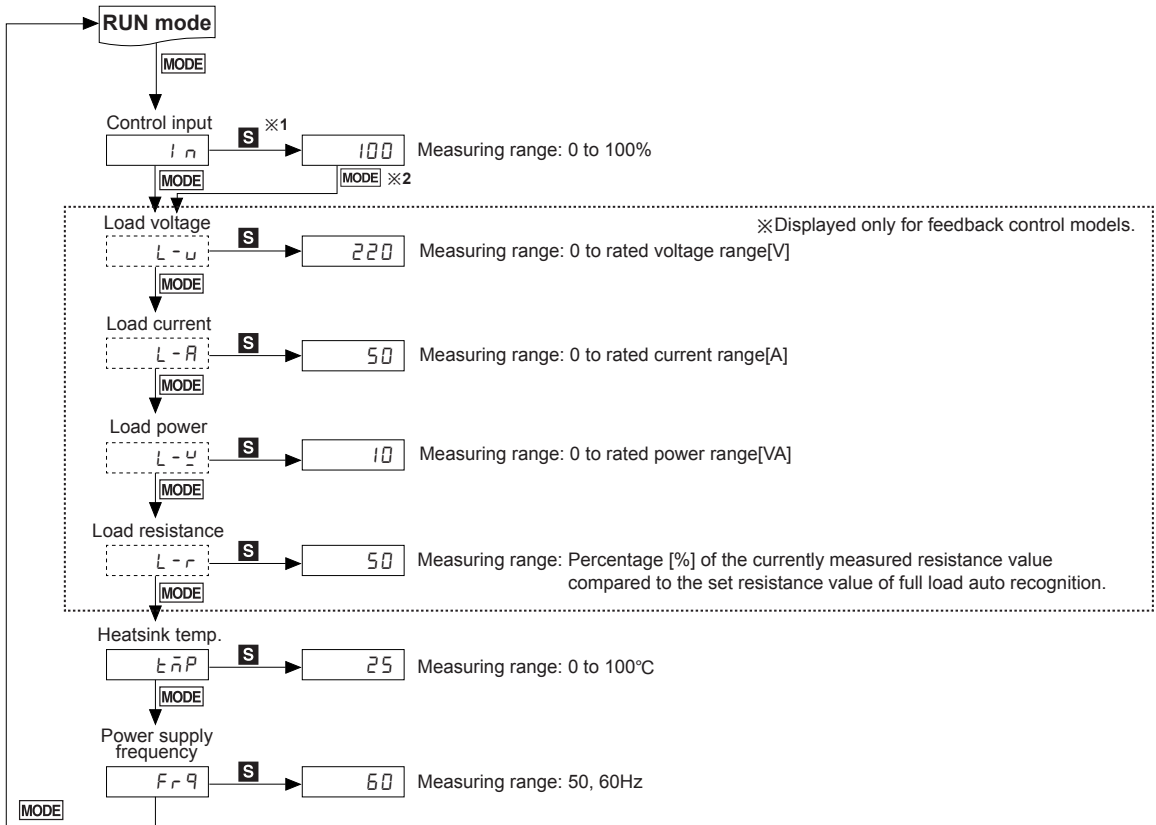

LED Display, Single-Phase/3-Phase, Slim, Power Controller


• SPR3 Series

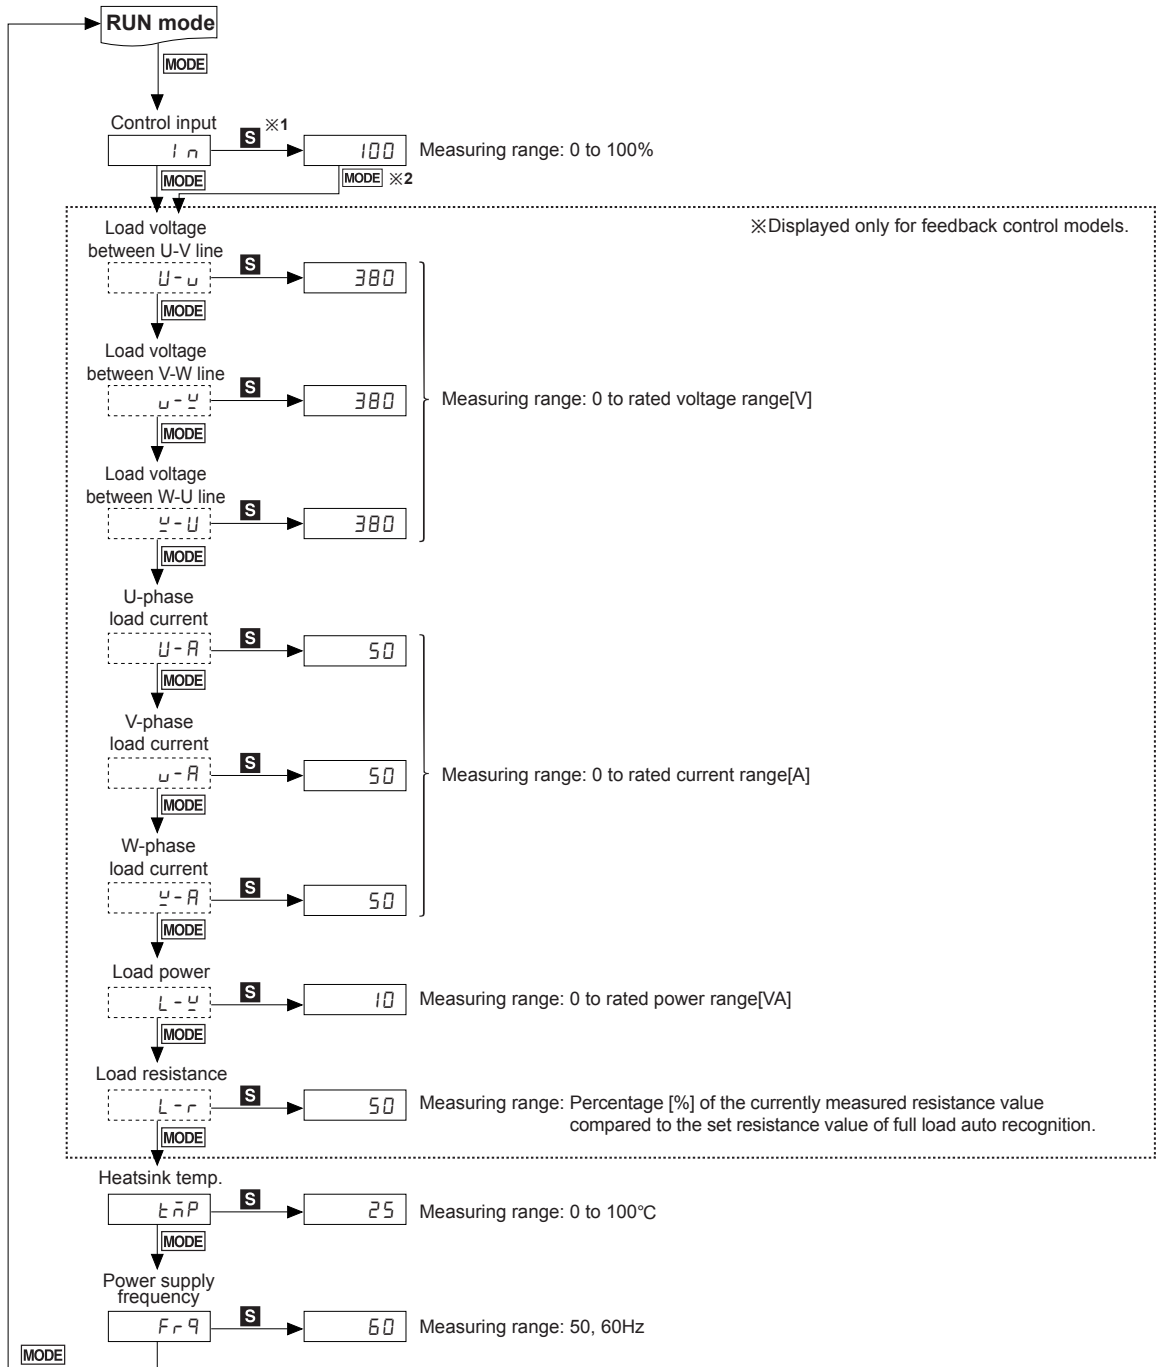


(A)	Photoelectric Sensors
(B)	Fiber Optic Sensors
(C)	Door/Area Sensors
(D)	Proximity Sensors
(E)	Pressure Sensors
(F)	Rotary Encoders
(G)	Connectors/ Connector Cables/ Sensor Distribution Boxes/Sockets
(H)	Temperature Controllers
(I)	SSRs / Power Controllers
(J)	Counters
(K)	Timers
(L)	Panel Meters
(M)	Tacho / Speed / Pulse Meters
(N)	Display Units
(O)	Sensor Controllers
(P)	Switching Mode Power Supplies
(Q)	Stepper Motors & Drivers & Controllers
(R)	Graphic/ Logic Panels
(S)	Field Network Devices
(T)	Software

SPR1/SPR3 Series


Parameter 1 group

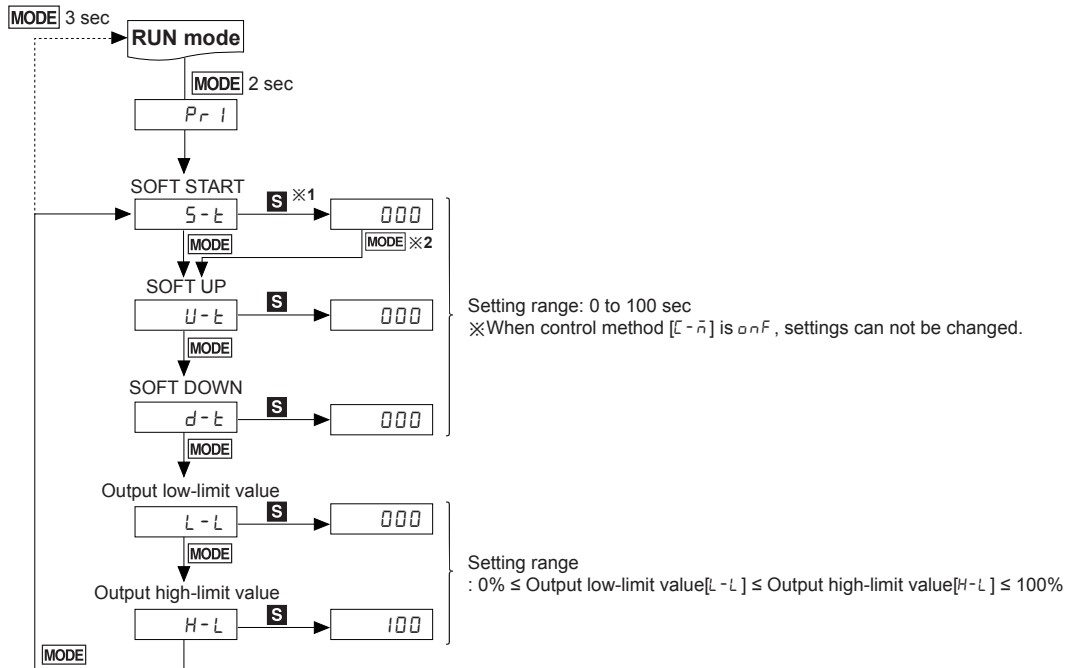

Parameter 2 group

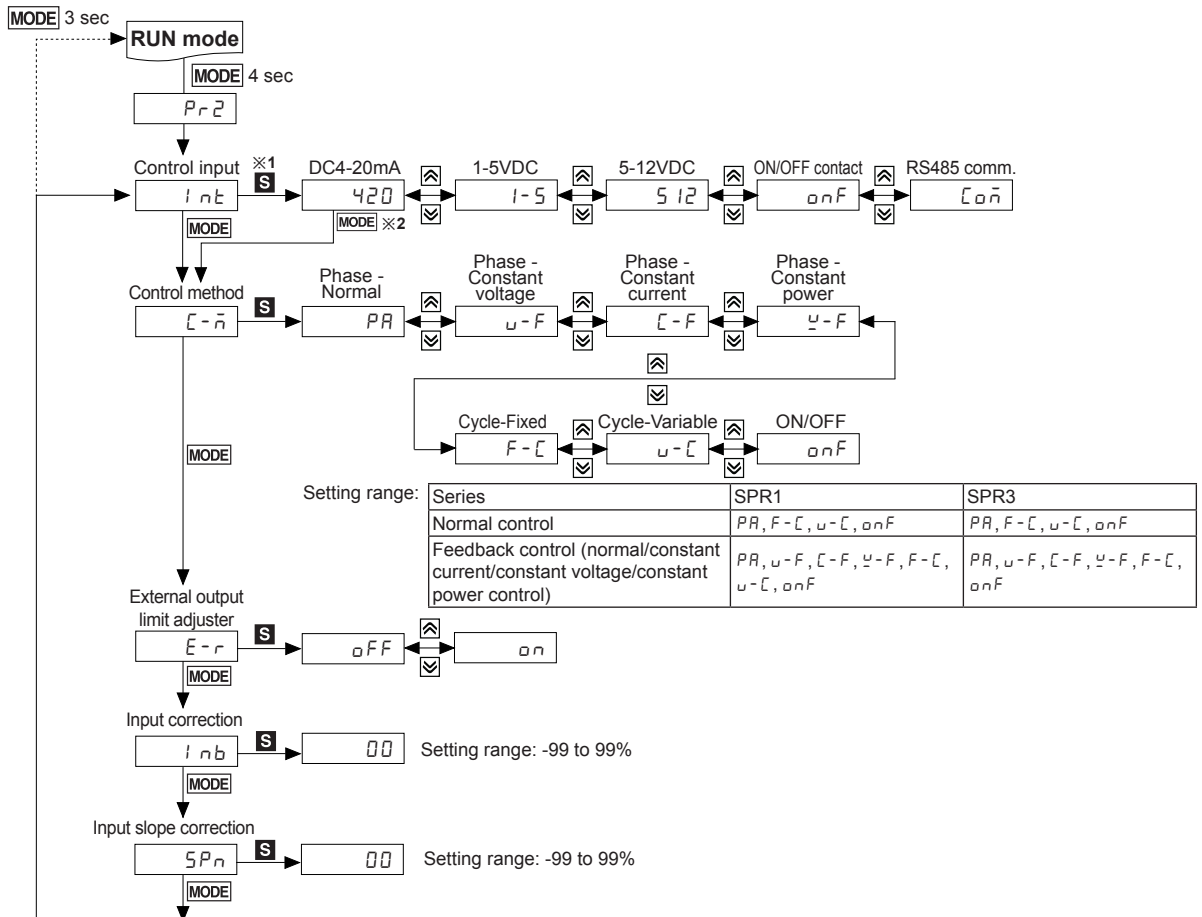


LED Display, Single-Phase/3-Phase, Slim, Power Controller

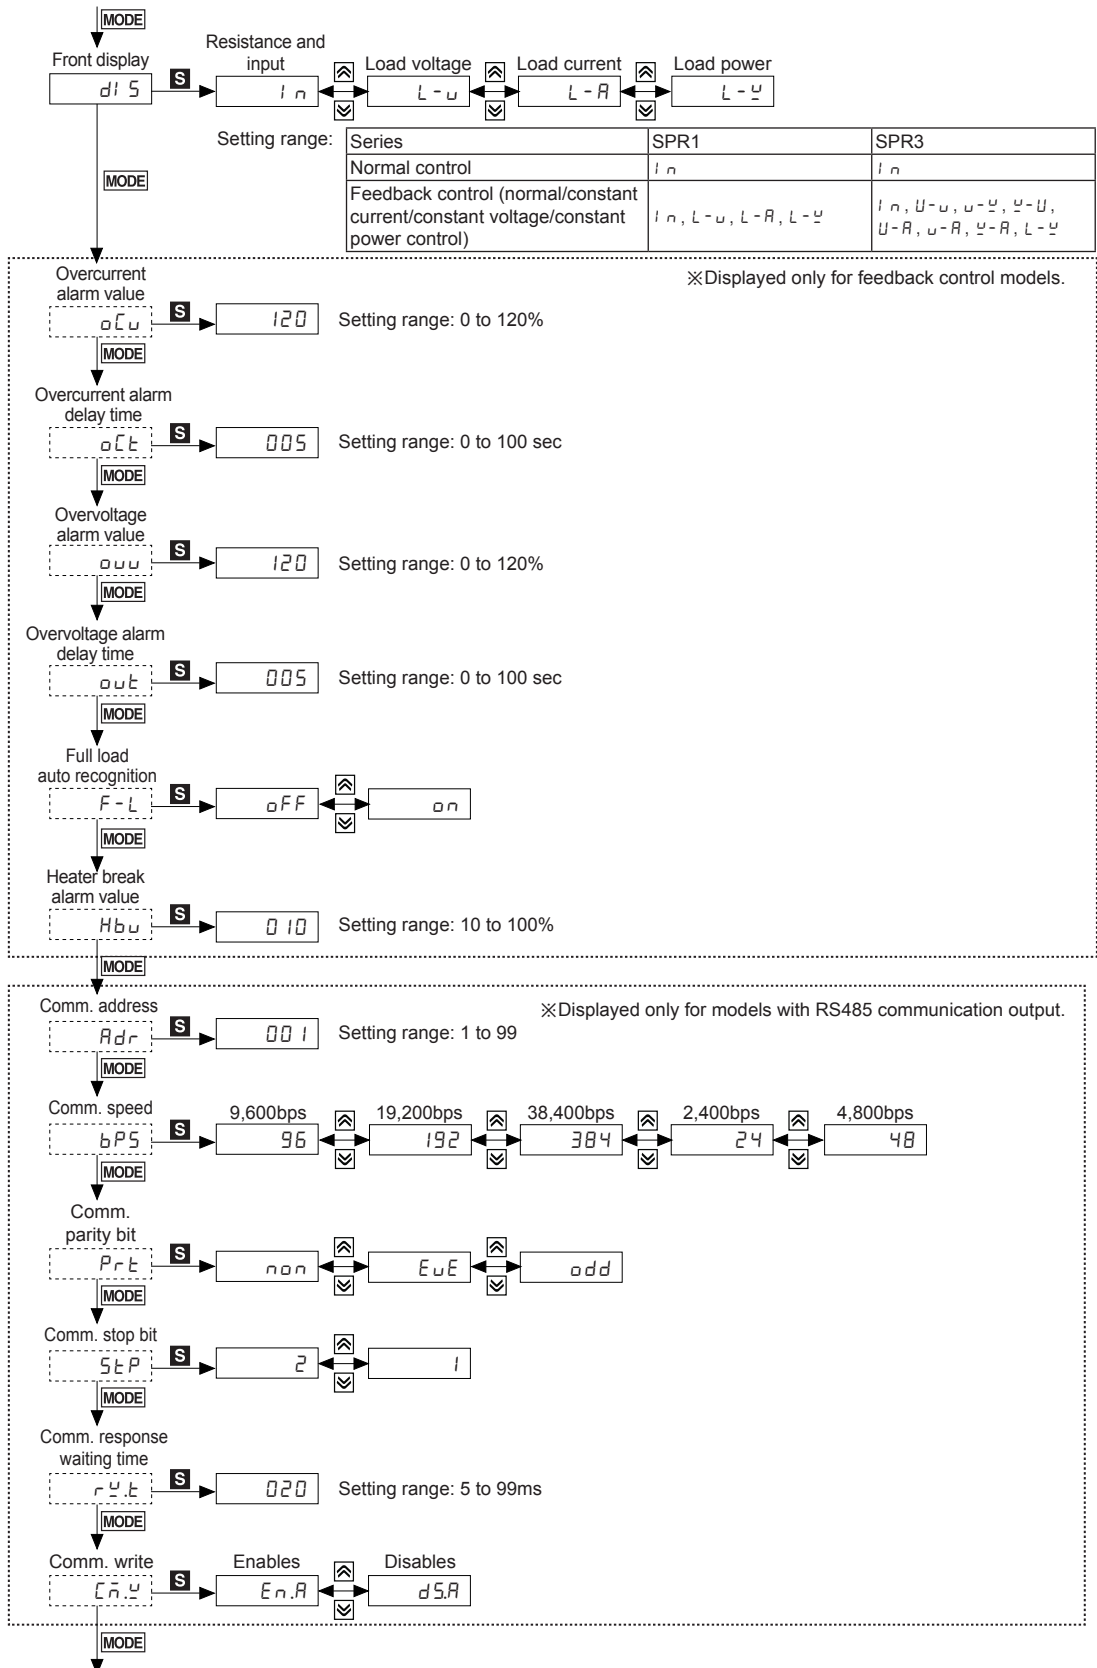

- (A) Photoelectric Sensors
- (B) Fiber Optic Sensors
- (C) Door/Area Sensors
- (D) Proximity Sensors
- (E) Pressure Sensors
- (F) Rotary Encoders
- (G) Connectors/ Connector Cables/ Sensor Distribution Boxes/Sockets
- (H) Temperature Controllers
- (I) SSRs / Power Controllers
- (J) Counters
- (K) Timers
- (L) Panel Meters
- (M) Tacho / Speed / Pulse Meters
- (N) Display Units
- (O) Sensor Controllers
- (P) Switching Mode Power Supplies
- (Q) Stepper Motors & Drivers & Controllers
- (R) Graphic/ Logic Panels
- (S) Field Network Devices
- (T) Software

SPR1/SPR3 Series

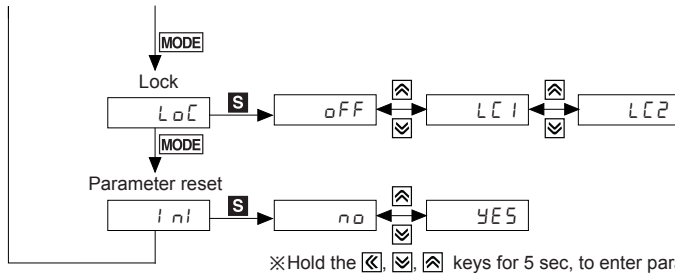

Setting range:

	Pr-1	Pr-2
oFF	●	●
LC1	◐	●
LC2	●	◐

●: Available to check/set


◐: Available to check/Unavailable to set

■ Control Method

◎ Phase control


● Normal control mode

It is general output method to divide control angle proportionally according to control input signal and to output it.




● Constant current feedback control mode

If temperature coefficient of load (platinum, molybdenum, tungsten, etc) changes 6 to 12 times based on room temperature, it outputs constant current which is proportion to control input not to change output voltage for power supply variation, load resistance variation.



● Constant voltage feedback control mode


At low temperature coefficient load (iron, chrome, nichrome, etc) of electrical resistance, it outputs constant output which is proportion to control input not to change output voltage for power supply variation, load resistance variation.



● Constant power feedback control mode

It is proper control method for a heater which resistance value variation by silicon carbide (SiC) heating is big. It outputs constant power which is proportion to control input even though load variation and power supply variation.

Output characteristics is proper 50% of the curve which connects the point (A) [output voltage 100% × output current 50%] and the point (B) [output voltage 50% × output current 100%]. The current output capacity of this unit should be over two times of load capacity.




◎ Cycle control


● Fixed cycle control mode

During fixed cycle (60 cycles) of load power, it repeats ON/OFF cycle as constant ratio according to control input signal and controls the power supplies on the load.

E.g.) When controlling output as 40%



E.g.) When controlling output as 90%




LED Display, Single-Phase/3-Phase, Slim, Power Controller

• Variable cycle control mode

Variable cycle control controls required power using min. cycles of load power according to control input signal and optimize temperature changes of the subject.


E.g.) When controlling output as 30%

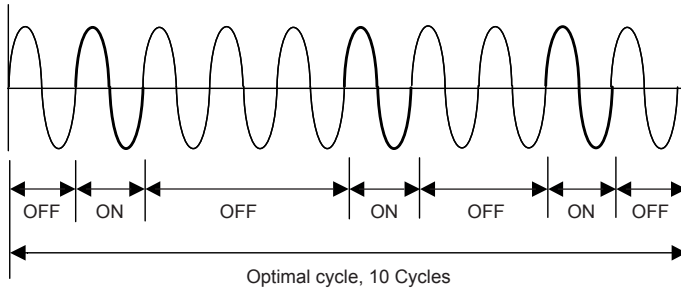

◎ ON/OFF control

This is control method that output is 100% at control input ON (approx. 18mA, min. 4.5VDC), and 0% at control input OFF (approx. 18mA, max. 4.5VDC).

※When using ON/OFF control method, output limit, SOFT START, SOFT UP/DOWN, input correction, and input slope correction functions are not settable.

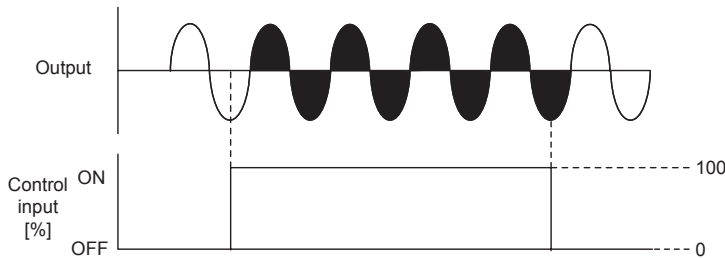


■ Functions

◎ Output limit (OUT ADJ)

This function will be $[\text{Control input (\%)} \times \text{OUT ADJ (\%)} = \text{Output}]$ and it controls the power supplied into the load. Although control input is 100% (5V or 20mA), the output is the 50% which is proportioned with OUT ADJ.


※This function can not be used for ON/OFF control method.

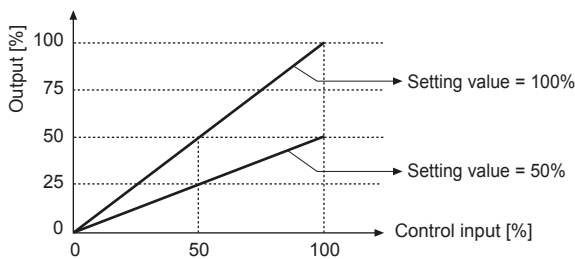

◎ SOFT START [S - t]


When the power is supplied, this function is able to protect the load when it controls load (molybdenum, white gold, infrared lamp) with inrush current or the width of rising temperature in big (SV is big). SOFT START set time (T) is the required time that output reaches to 100%, and it is differentiated by OUT ADJ set value.

※This function can not be used for ON/OFF control method.

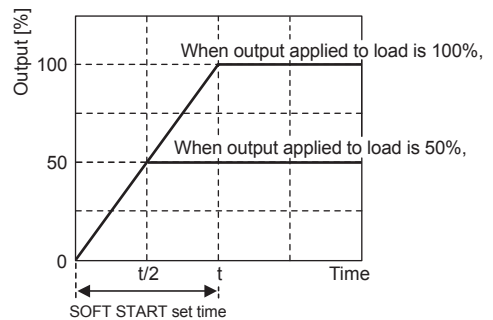

◎ Output high limit/low limit value [H - L / L - L]

This function is to limit output range to protect load.

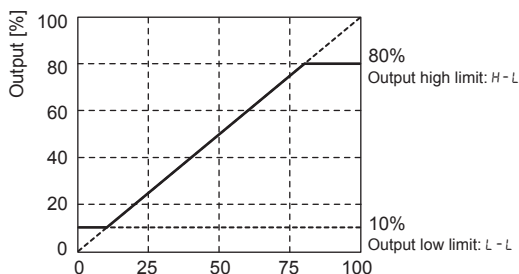


- (A) Photoelectric Sensors
- (B) Fiber Optic Sensors
- (C) Door/Area Sensors
- (D) Proximity Sensors
- (E) Pressure Sensors
- (F) Rotary Encoders
- (G) Connectors/ Connector Cables/ Sensor Distribution Boxes/Sockets
- (H) Temperature Controllers
- (I) SSRs / Power Controllers
- (J) Counters
- (K) Timers
- (L) Panel Meters
- (M) Tacho / Speed / Pulse Meters
- (N) Display Units
- (O) Sensor Controllers
- (P) Switching Mode Power Supplies
- (Q) Stepper Motors & Drivers & Controllers
- (R) Graphic/ Logic Panels
- (S) Field Network Devices
- (T) Software

SPR1/SPR3 Series

◎ SOFT UP/DOWN [$U-t$ / $d-t$]

Unlike SOFT START which operates only once at supplying power, this function protects load from the inrush current in the RUN mode. When reached to the target output value, operation stops.

※ This function can not be used for ON/OFF control method.

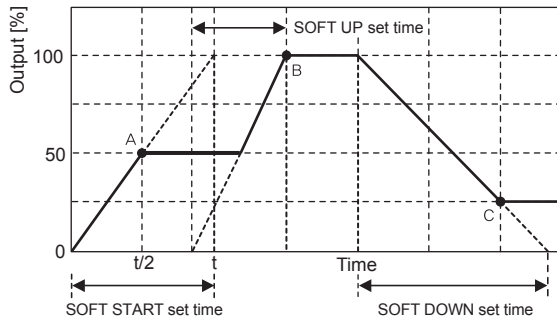


A: SOFT START function finished.
B: SOFT UP function finished.
C: SOFT DOWN function finished.

◎ Input correction [$i nb$]

It compensates the offset between actual input value and measured input value.

E.g.) When the input monitoring value is 5% at 4mA in DC4-20mA control input, setting $i nb$ to -5 calibrates the input monitoring value to 0%.

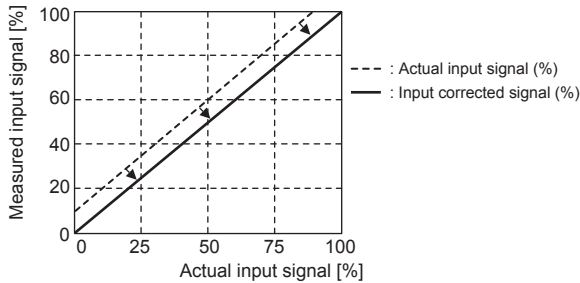


◎ Input slope correction [$5Pn$]

It compensates the gain of the measured 100% input for actual 100% input value.

Calibrated monitoring value = Monitoring value + $\frac{\text{Monitoring value}}{100 - 5Pn} \times 5Pn$

E.g.) When the input monitoring value is 99% at 4mA in DC4-20mA control input, setting $5Pn$ to 1 calibrates the input monitoring value to 100%.

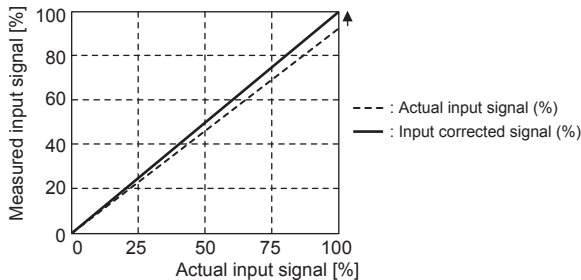

◎ RUN/STOP switching

RUN/STOP status of the power controller can be switched with the external RUN/STOP contact. In the RUN mode, the operation indicator on the front turns on.



◎ AUTO/MANUAL selection

Operation mode (auto control/manual control) of the power controller can be selected with the external AUTO/MAN contact. In the manual control mode, the manual control indicator on the front turns on.



◎ RESET

In the event of system anomalies and alarms, RESET input restarts the power controller. (Parameters are not initialized.) Or, hold the \square \square keys for 2 sec, to operates RESET.



◎ Alarm

Type	Error	Operation	Clear alarm	Display priority
SCR error alarm ^{*1}	$5Cr$	Output stops. (SCR OFF)	- Re-supply the power. - RESET - Switch to STOP mode	1
Overcurrent alarm ^{*1}	$o-c$			2
Fuse break alarm	FUS			3
Heatsink overheat alarm	tEn			4
Overvoltage alarm ^{*1}	$o-u$			5
Heater break alarm ^{*1}	$H-b$	Continues operation	Automatically cleared when returning within the setting range	6

※1: This is only for feedback control models.

※ For models with alarm output, the error message and alarm indicator flash at the same time, and alarm output turns on.

※ When multiple alarms occur at the same time, the highest priority error message will be displayed based on priority.

1) SCR error alarm

Even though output is 0%, if the current of 10% or more of the rated load current flows for over 3 sec continuously, SCR error alarm occurs and output stops.

2) Overcurrent alarm [$o-c$]

This function protects the load from overcurrent.

If the current flows over the overcurrent alarm setting value and setting delay time, overcurrent alarm occurs and output stops.

3) Heatsink overheat alarm

When the temperature of a heatsink is over 85°C, heatsink overheat alarm occurs and output stops.

4) Overvoltage alarm [$o-u$]

This function protects the load from overvoltage.

If the current flows over the overvoltage alarm setting value and setting delay time, overvoltage alarm occurs and output stops.

5) Heater break alarm [$H-b$]

Comparing the full load resistance value and the current load resistance value, if the current load resistivity is maintained under the setting value for over 3 sec continuously, heater break alarm occurs. Output does not stop and operates normally.

Current load resistivity(%) = $\frac{\text{Full load resistance value}}{\text{Current load resistance value}} \times 100$

◎ Full load auto recognition [$F-L$]

This function recognizes the load resistance value automatically. Turning on this function operates the load with 100% of output for approx. 3 sec and sets the load resistance value in the product automatically.

※ This is only for feedback control models.

LED Display, Single-Phase/3-Phase, Slim, Power Controller

◎ RMS display/control

SPR Series measures and displays RMS value for maintaining accuracy.

E.g.) At pure resistance load, when control input is 4-20mA, rating is 220V or 50A.

Control input	4mA	8mA	12mA	16mA	20mA	Unit
Amount of control input	0	25	50	75	100	%
Display voltage (normal control mode)	0	66	155	210	220	V
Display voltage (constantvoltage feedback control mode)	0	55	110	165	220	V
Display current (constantcurrent feedback control mode)	0	12	25	38	50	A

■ RS485 Communication Output


※Applicable for models with RS485 communication output through option output (SPR□-□□T□□).

Please refer to '■ Ordering Information'.

◎ Communication Specifications

Comm. protocol	Modbus RTU	Comm. speed	2400, 4800, 9600, 19200, 38400 bps
Connection method	RS485	Comm. response time	5 to 99ms (default: 20ms)
Application standard	Compliance with EIA RS485	Start bit	1-bit (fixed)
Max. connections	31 units (address: 1 to 99)	Data bit	8-bit (fixed)
Synchronization method	Asynchronous	Parity bit	None, Even, Odd
Comm. method	Two-wire half duplex	Stop bit	1-bit, 2-bit
Comm. distance	Max. 800m		

◎ Application of system organization

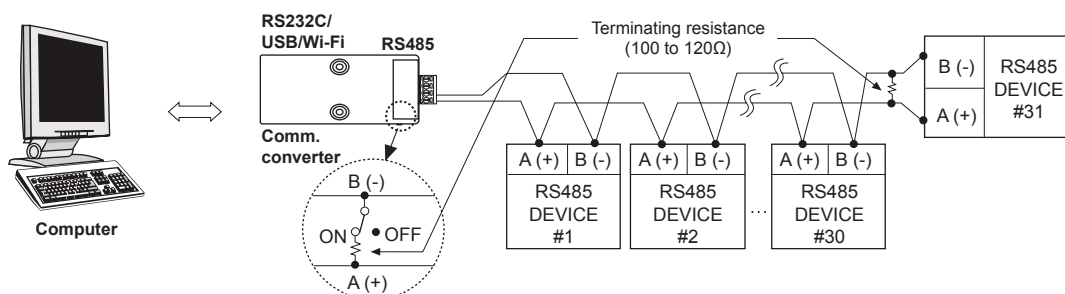

※It is recommended to use Autonics communication converter; SCM-WF48 (Wi-Fi to RS485-USB wireless communication converter, sold separately), SCM-US48I (USB to RS485 converter, sold separately), SCM-38I (RS232C to RS485 converter, sold separately). Please use twisted pair wire, which is suitable for RS485 communication, for SCM-WF48, SCM-US48I and SCM-38I.

■ Sold Separately

◎ Communication converter

- **SCM-WF48**
(Wi-Fi to RS485-USB wireless communication converter)



- **SCM-US48I**
(USB to RS485 converter)



- **SCM-38I**
(RS232C to RS485 converter)



(A) Photoelectric Sensors

(B) Fiber Optic Sensors

(C) Door/Area Sensors

(D) Proximity Sensors

(E) Pressure Sensors

(F) Rotary Encoders

(G) Connectors/ Connector Cables/ Sensor Distribution Boxes/Sockets

(H) Temperature Controllers

(I) SSRs / Power Controllers

(J) Counters

(K) Timers

(L) Panel Meters

(M) Tacho / Speed / Pulse Meters

(N) Display Units

(O) Sensor Controllers

(P) Switching Mode Power Supplies

(Q) Stepper Motors & Drivers & Controllers

(R) Graphic/ Logic Panels


(S) Field Network Devices

(T) Software


SPR1/SPR3 Series

■ Removing the Case

◎ SPR1 Series

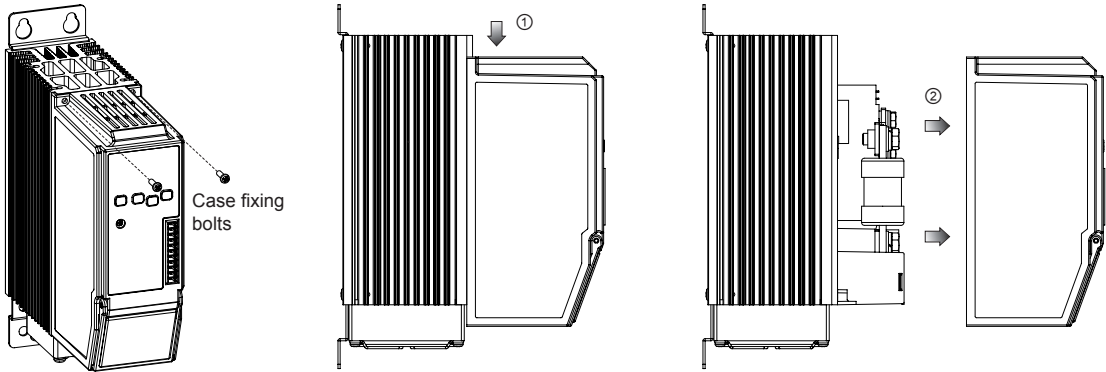

◎ SPR3 Series

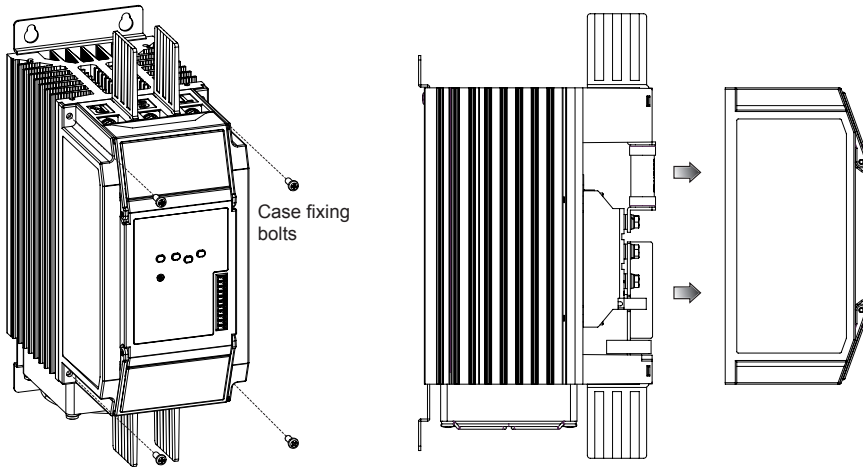


● Spec. of case fixing bolts

Rated load current	Spec. of bolts
25A, 35A, 50A, 70A	M3
100A, 150A	M4

LED Display, Single-Phase/3-Phase, Slim, Power Controller

■ Replacement of Fuse

◎ SPR1 Series

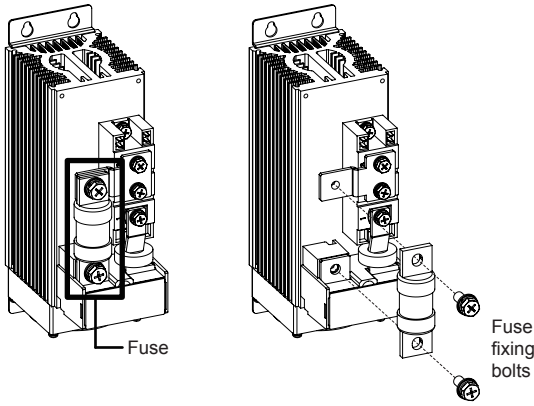

● Spec. of fuse fixing bolts

Series	SPR1	SPR3
Rated load current		
25A	M6	M6
35A		
50A		
70A		
100A	M8	Top: M8
150A		Bottom: M6
		M8

● Recommended fuse specifications


For replacing the fuse, please use the recommended fuse which has the below specifications.
(manufacturer: BUSSMANN, HINODE)

Series	SPR1	SPR3
Rated load current		
25A	50FE	50FE
35A	63ET	63ET
50A	80ET	80ET
70A	100FE	100FE
100A	FWH-150B	660GH-160 ^{※1}
150A	FWH-200B	660GH-200 ^{※1}

※1: Fuse manufacture: HINODE

※ The performance of the product is guaranteed only when using the fuse provided by us.

◎ SPR3 Series

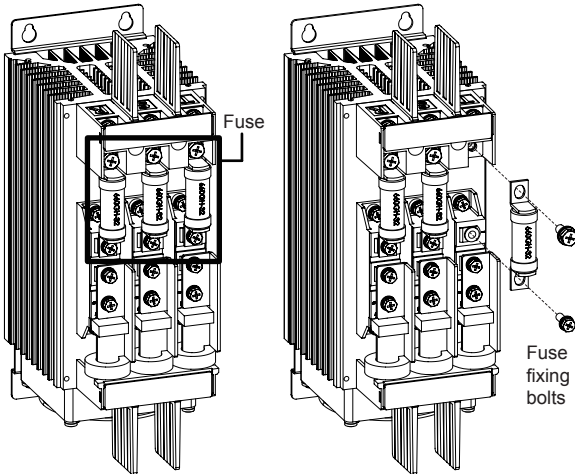

■ Proper Usage

⚠ Cautions during use

- Follow instructions in 'Cautions during Use'. Otherwise, it may cause unexpected accidents.
- Use the product, after 3 sec of supplying power.
- Before use, set the mode and function according to the specification.
Especially, be cautious that the product does not operate when OUT ADJ. is set to 0%. Since changing the mode/parameter during operation may result in malfunction, set the mode and function after disconnecting load output.
- Re-supply the power to the unit after the unit is discharged completely.
Failure to follow this instruction may result in malfunction.
- To ensure the reliability of the product, install the product on the panel or metal surface vertically to the ground.
- Install the unit in the well ventilated place.
- While supplying power to the load or right after turning off the power of the load, do not touch the body and heat sink.
Failure to follow this instruction may result in a burn due to the high temperature.
- Install a power switch or circuit breaker in the easily accessible place for supplying or disconnecting the power.
- Do not wire to terminals which are not used.
- Since inter element can be damaged when using with coil load, inductive load, etc., the inrush current must be under the rated load current.
- Do not use near the equipment which generates strong magnetic force or high frequency noise.
- This unit may be used in the following environments.
 - Indoors (in the environment condition rated in 'Specifications')
 - Altitude max. 2,000m
 - Pollution degree 2
 - Installation category III

(A) Photoelectric Sensors

(B) Fiber Optic Sensors

(C) Door/Area Sensors

(D) Proximity Sensors

(E) Pressure Sensors

(F) Rotary Encoders

(G) Connectors/ Connector Cables/ Sensor Distribution Boxes/Sockets

(H) Temperature Controllers

(I) SSRs / Power Controllers

(J) Counters

(K) Timers

(L) Panel Meters

(M) Tacho / Speed / Pulse Meters

(N) Display Units

(O) Sensor Controllers

(P) Switching Mode Power Supplies

(Q) Stepper Motors & Drivers & Controllers

(R) Graphic/ Logic Panels

(S) Field Network Devices

(T) Software